

**BONTRAGER****WHEEL SPECIFICATIONS**

Line Comp 30 Front TLR Disc 27.5 Boost

**Wheel Components**

TCG Part Number	Description
552513	Wheel
NA	Hub (OE use only, not available for aftermarket purchase)
W543004	Rim (Line Elite 30)
416019	Drive Side Spokes
993225	Non-Drive Side Spokes
415760	Nipples
W439597	Tubeless Rim Strip
W527257	Tubeless Valve Stem

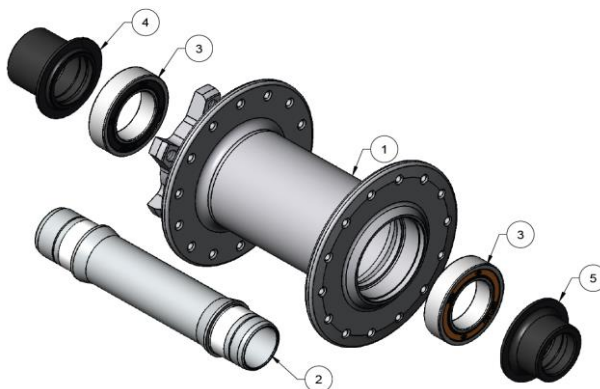
**Hub Service Parts**

Diagram Number	TCG Part Number	Description
1	NA	Hub Shell
2	516627	Axle
3	431759	30187 Bearing 18x30x7 (2 required)
4,5	431778	End Caps 15mm

### Wheel Building Information and Specifications

Value	Description or Specification
<b>Wheel Building Information</b>	
0.5	Hop (mm)
0.5	Wobble (mm)
540	Wheel stress level disc side up (degrees of rotation, measured on Bontrager Stressor)
540	Wheel stress level non-disc side up (degrees of rotation, measured on Bontrager Stressor)
1.0	Dish (mm) - Maximum gauge reading (First side rim to endcap minus second side rim to end cap)
195 lbs min, 325 lbs max OR 87 kgf min, 148 kgf max	Spoke tension - disc side
Lacing pattern non-disc side	2 cross, woven. First hole CCW from valve hole is a pushing spoke (viewed from the non-disc side).
Lacing pattern disc side	2 cross, woven. First hole CCW from valve hole is a pulling spoke (viewed from the disc side).
<b>Size Specifications</b>	
261mm	Spoke length drive
259mm	Spoke length non-drive
550mm	Rim ERD
24mm	Rim height
33mm	Rim outer width
29mm	Rim hook bead width
NA	Rim spoke offset
<b>Other Specifications</b>	
934g	Wheel weight
Black/Black/Black	Wheel color
Black	Hub color
Black	Spoke color
Black/Anthracite	Rim color
28	Spoke count
14G	Spoke gauge
6-Bolt	Disc bolt pattern
Yes	Tubeless ready

|

|

