




## CAPRA UNCAGED 11

FRAME	High Modulus Carbon Frame	V4L   170 mm   148 x 12 mm DT Swiss Thru Axle   UDH
FORK	ÖHLINS RXF38 M. 2	29"   170 mm   H/LSC LSR   15x110 mm   44 mm Offset
SHOCK	ÖHLINS TTX22 M	230 x 65 mm   H/LSC LSR   C10R40 (S-L)   C10R50 (XL-XXL)
SPRING	ÖHLINS Steel	343 lbs (S)   365 (M)   388 (L)   411 (XL)   434 (XXL)
HEADSET	CANE CREEK Series 40	ZS44 ZS56   High Cap   2 Spacer 5mm
STEM	RENTHAL Apex 35	50 mm   +/-6°   Black/Gold
HANDLEBAR	RENTHAL Fatbar 35	800 mm   20 mm (S-M)   30 mm (L-XXL)   7° Back   5° Up
GRIPS	ODI ELITE MOTION V2.1	Lock-On
CRANKSET	SRAM GX Eagle Transmission	170 mm   32T   DUB
CHAINGUIDE	E13 TRS PLUS	105   28-34 T   Compact Slide
CASSETTE	SRAM XS 1275 Transmission	10-52T   12-Speed
DERAILLEUR	SRAM GX Eagle Transmission	12-Speed
SHIFTER REAR	SRAM GX Eagle AXS	12-Speed   2 Button   MMX
WHEELSET	CRANKBROTHERS Synthesis	29" 31,5 mm   110 x 15 mm   6-Bolt
	Enduro Carbon	27,5" 29,5 mm   148 x 12 mm   6-Bolt   XD
TIRE FRONT	MAXXIS Assegai	29" x 2.5 WT   3C MaxxGrip   EXO+   TR
TIRE REAR	MAXXIS Minion DHR II	27,5" x 2.4 WT   3C MaxxTerra   Double Down   TR
BRAKES	SRAM Code RSC	Rotor CENTERLINE 200 mm   200 mm
SEATPOST	ROCKSHOX REVERB AXS	Ø 31.6 mm   MMX-Remote   125 mm (S)   150 mm (M)   170 mm (L-XXL)
SADDLE	SDG BEL Air 3.0	140 mm   Lux-Alloy Rail   YT Custom Design
BOTTOM BRACKET	SRAM DUB Pressfit	BB DUB PF 92 MTB WIDE

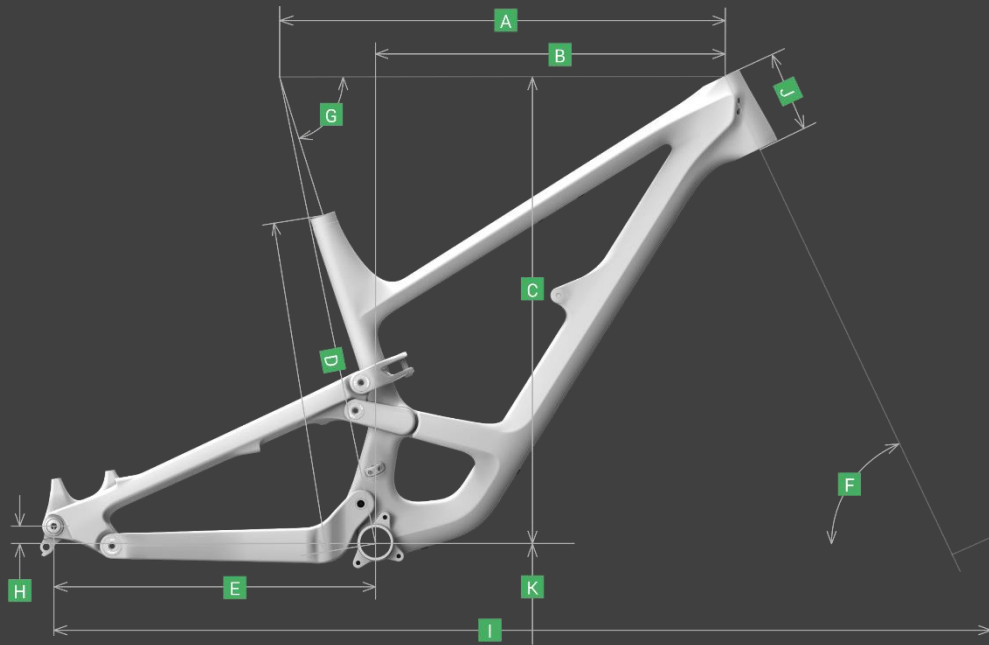

## CAPRA UNCAGED 11

		S	M	L	XL	XXL
A	toptube	564 mm	587 mm	607 mm	630 mm	653 mm
B	reach	424 mm	444 mm	464 mm	484 mm	504 mm
C	stack	627 mm	636 mm	636 mm	645 mm	654 mm
D	seattube	395 mm	420 mm	445 mm	470 mm	495 mm
E	chainstay	433 mm	433 mm	433 mm	438 mm	438 mm
F	headtube angle	64 / 64,3 °	64 / 64,3 °	64 / 64,3 °	64 / 64,3 °	64 / 64,3 °
G	seattube angle (eff)	77,5 / 77,8 °	77,4 / 77,7 °	77,4 / 77,7 °	77,4 / 77,7 °	77,3 / 77,6 °
H	bb drop (low)	F30 R12 mm	F30 R12 mm	F30 R12 mm	F30 R12 mm	F30 R12 mm
	bb drop (high)	F25 R7 mm	F25 R7 mm	F25 R7 mm	F25 R7 mm	F25 R7 mm
I	wheelbase	1199 mm	1223 mm	1243 mm	1272 mm	1297 mm
J	headtube	100 mm	110 mm	110 mm	120 mm	130 mm
K	bb height	346 / 351 mm	346 / 351 mm	346 / 351 mm	346 / 351 mm	346 / 351 mm
	standover height	743 mm	735 mm	733 mm	744 mm	741 mm