




TUES UNCAGED 11

FRAME	Alloy Frame	V4L 200 mm 150x12 mm DT Swiss Thru Axle
FORK	ÖHLINS DH38 Air TTX18	27,5" 200 mm H/LSC LSR 20x110 mm 46 mm Offset
SHOCK	ÖHLINS TTX22 M	267 x 89 mm H/LSC LSR C20R20 (S-L) C20R35 (XL-XXL)
SPRING	ÖHLINS Steel	251 lbs (S) 251 (M) 274 (L) 297 (XL) 320 (XXL)
HEADSET	Acros AZX-257	ZS49 ZS56 High Cap 1 Spacer 5 mm
STEM	Renthal Integra 35	50 mm 0 Rise Black / Gold
HANDLEBAR	RENTHAL Fatbar 35	800 mm 20 mm (S-M) 30 mm (L-XXL) 7° Back 5° Up
GRIPS	ODI ELITE MOTION V2.1	Lock-On
CRANKSET	SRAM X01 DH	165 mm 34T Custom DUB
CHAINGUIDE	E13 TRS PLUS	I05 28-34 T Compact Slide
CASSETTE	SRAM CS PG-720	11-25T 7-Speed
DERAILLEUR	SRAM X01 DH	7-Speed Medium Cage
SHIFTER REAR	SRAM X01 DH	7-Speed MMX
WHEELSET	CRANKBROTHERS Synthesis DH Alloy	27,5" 31,5 mm 110 x 20 mm 6-Bolt 27,5" 31,5 mm 150 x 12 mm 6-Bolt HG
TIRE FRONT	MAXXIS Assegai	27,5"x2.5 3C MaxxGrip DH TR
TIRE REAR	MAXXIS Assegai	27,5"x2.5 3C MaxxGrip DH TR
BRAKES	SRAM Code RSC	Rotor CENTERLINE 200 mm 200 mm
SEATPOST	SDG I-Beam Alloy	Ø 30.9 mm 300 mm Length
SADDLE	SDG I-FLY 2.0	YT Custom Design Width 128 mm I-Beam
BOTTOM BRACKET	SRAM DUB Pressfit	PF30 83 DH

COLOR: ELECTRIC YELLOW

SIZES: S,M,L,XL,XXL

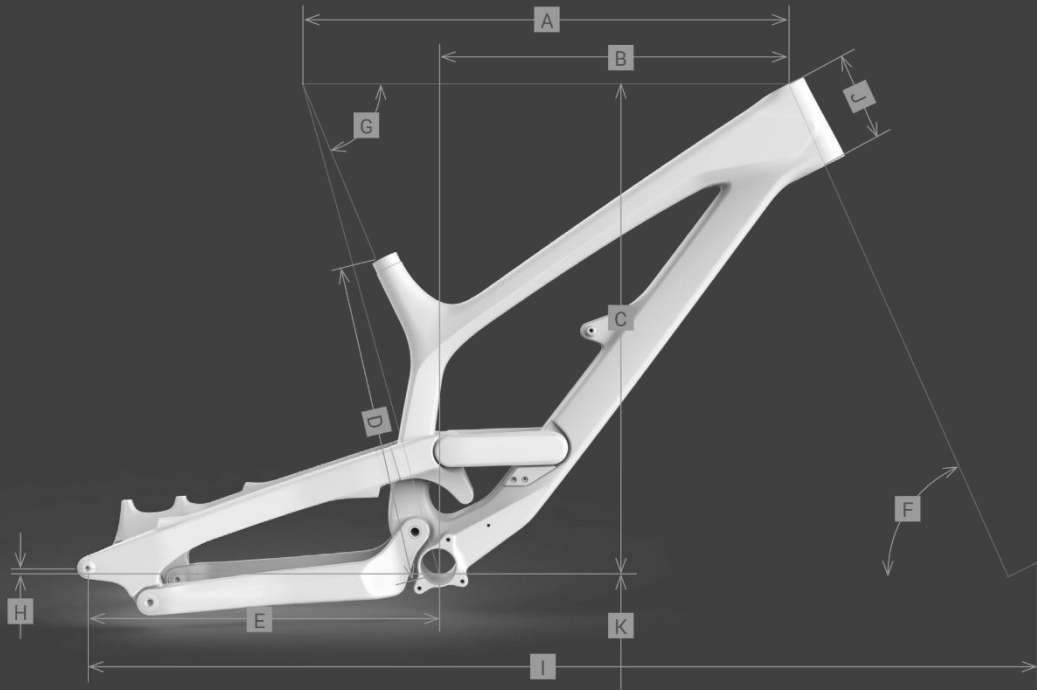

TUES UNCAGED 11

		S	M	L	XL	XXL
A	toptube	584 mm	606 mm	633 mm	659 mm	682 mm
B	reach	410 mm	429 mm	452 mm	474 mm	495 mm
C	stack	601 mm	605 mm	614 mm	621 mm	626 mm
D	seattube	400 mm	400 mm	400 mm	420 mm	420 mm
E	chainstay	435 mm	435 mm	435 mm	440 mm	440 mm
F	headtube angle	63,5 °	63,5 °	63,5 °	63,5 °	63,5 °
G	seattube angle (eff)	73,5 °	73,5 °	73,5 °	73,5 °	73,5 °
H	bb drop	7 mm	7 mm	7 mm	7 mm	7 mm
I	wheelbase	1199 mm	1220 mm	1248 mm	1278 mm	1302 mm
J	headtube	100 mm	105 mm	115 mm	123 mm	129 mm
K	bb height	351 mm	351 mm	351 mm	351 mm	351 mm
	standover height	707 mm	709 mm	714 mm	723 mm	727 mm