

CAPRA




CAPRA 29 CORE 5

FRAME	Ultra Modulus Carbon Frame	V4L 165 mm 148 x 12 mm DT Swiss Thru Axle UDH
EXT STORAGE	CRANKBROTHERS	S.O.S TS2 Tube Stash OE
FORK	ÖHLINS RXF38 M. 2	29" 170 mm H/LSC LSR 15x110 mm 44 mm Offset
SHOCK	ÖHLINS TTX22 M. 2	230 x 65 mm H/LSC LSR C10R40 (S-L) C10R50 (XL-XXL)
SPRING	ÖHLINS Steel	343 lbs (S) 365 (M) 388 (L) 411 (XL) 434 (XXL)
HEADSET	CANE CREEK Series 40	ZS44 ZS56 High Cap 2 Spacer 5mm
STEM	RENTHAL Apex 35	50 mm +/-6° Black/Gold
HANDLEBAR	RENTHAL Fatbar 35	800 mm 7° Back 5° Up Custom Black 20 mm Rise (S - M) 30 mm Rise (L - XXL)
GRIPS	ODI ELITE MOTION V2.1	Lock-On
CRANKSET	SRAM XO Eagle Transmission	170 mm 32T T-Type DUB
CHAINGUIDE	E13 TRS PLUS	105 28-34 T Compact Slide
CASSETTE	SRAM XO Eagle Transmission	10-52T XS-1295 12-Speed
DERAILLEUR	SRAM XO Eagle Transmission	12-Speed T-Type
SHIFTER REAR	SRAM AXS Rocker Paddle	12-Speed Rocker MMX
WHEELSET	CRANKBROTHERS Synthesis	29" 31,5 mm 110 x 15 mm 6-Bolt I9 1/1
	Enduro 3 Alloy I9 1/1	29" 29,5 mm 148 x 12 mm 6-Bolt I9 1/1 XD
TIRE FRONT	MAXXIS Assegai	29" x 2.5 WT 3C MaxxGrip Double Down TR
TIRE REAR	MAXXIS Minion DHR II	29" x 2.4 WT 3C MaxxTerra Double Down TR
BRAKES	SRAM Code RSC	Rotor HS2 200 mm 200 mm
SEATPOST	YT POSTMAN V2	Ø 31.6 mm MMX-Remote Adjustable drop 20 / 10 / 5 mm 125 mm (S) 150 mm (M) 170 mm (L-XL) 200 mm (XXL)
SADDLE	SDG BEL Air 3.0	140 mm Lux-Alloy Rail YT Custom Design
BOTTOM BRACKET	SRAM DII R Pressfit	RR DII R PF MTR 92 WIDE

COLOR: LIQUID METAL, BLACK MAGIC

SIZES: S,M,L,XL,XXL

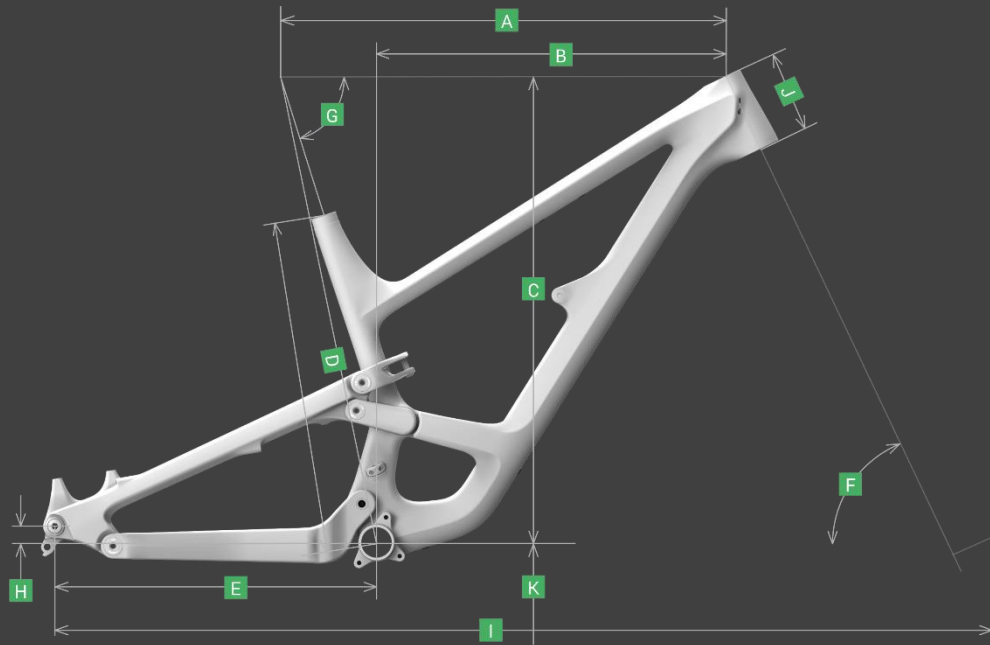

CAPRA 29 CORE 5

		S	M	L	XL	XXL
A	toptube	563 mm	586 mm	606 mm	629 mm	652 mm
B	reach	427 mm	447 mm	467 mm	487 mm	507 mm
C	stack	625 mm	634 mm	634 mm	643 mm	652 mm
D	seattube	395 mm	420 mm	445 mm	470 mm	495 mm
E	chainstay	438 mm	438 mm	438 mm	443 mm	443 mm
F	headtube angle	64,2 / 64,5 °	64,2 / 64,5 °	64,2 / 64,5 °	64,2 / 64,5 °	64,2 / 64,5 °
G	seattube angle (eff)	77,7 / 78,0 °	77,6 / 77,9 °	77,6 / 77,9 °	77,6 / 77,9 °	77,5 / 77,8 °
H	bb drop	27 / 22 mm	27 / 22 mm	27 / 22 mm	27 / 22 mm	27 / 22 mm
I	wheelbase	1204 mm	1228 mm	1248 mm	1277 mm	1302 mm
J	headtube	100 mm	110 mm	110 mm	120 mm	130 mm
K	bb height	349 / 354 mm	349 / 354 mm	349 / 354 mm	349 / 354 mm	349 / 354 mm
	standover height	745 mm	737 mm	735 mm	746 mm	743 mm